


Cartridge

280 Ack Imp - 140 grain

Version 9.0

NOSLER®

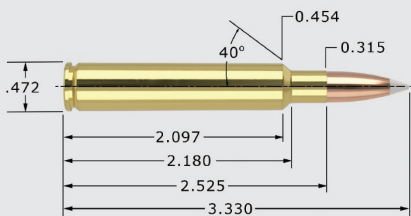

280 Ack Imp - 140 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.330"	0.485	0.248
Ballistic Tip®	BT	140gr. Spitzer	3.330"	0.485	0.248
CT® Ballistic Silvertip®	BST	140gr. Spitzer	3.330"	0.485	0.248
Expansion Tip®	ET	140gr. Spitzer	3.300"	0.489	0.248

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

Partition®	PT	140gr. Spitzer	3.330"	0.434	0.248
------------	-----------	----------------	--------	-------	-------

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	65.4 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160	59.5 MAX. 3158		** 101%
	57.5 3098		98%
	55.5 * 3038		94%
H4831SC	62.5 MAX. 3177		100%
	60.5 3103		96%
	58.5 * 3029		93%
IMR 4350	58.0 MAX. 3197		95%
	56.0 3096		92%
	54.0 * 2995		88%
IMR 4831	60.0 * MAX. 3222		98%
	Most Accurate 58.0 3114		95%
	Powder Tested 56.0 3006		92%
RL17	58.0 * MAX. 3241		92%
	56.0 3130		89%
	54.0 3018		85%
IMR 7828	64.5 * MAX. 3243		** 105%
	62.5 3134		** 102%
	60.5 3025		98%
N560	63.5 MAX. 3252		** 108%
	61.5 * 3149		** 104%
	59.5 3046		** 101%
RL19	63.0 MAX. 3254		** 105%
	61.0 * 3134		** 101%
	59.0 3015		98%
Norma MRP	64.0 MAX. 3262		** 108%
	62.0 * 3170		** 104%
	60.0 3079		** 101%
RL22	64.0 * MAX. 3266		** 106%
	62.0 3152		** 103%
	60.0 3038		100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load