


# Cartridge

## 280 Ack Imp - 150 grain

Version 9.0

# NOSLER®

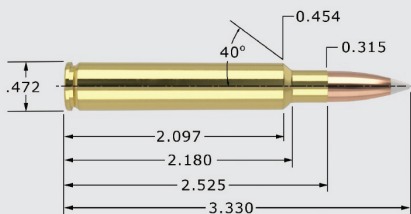

## 280 Ack Imp - 150 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	3.330"	0.493	0.266
AccuBond® Long Range	<b>ABLR</b>	150gr. Spitzer	3.330"	0.546	0.266
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	3.330"	0.493	0.266
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	3.330"	0.493	0.266
Expansion Tip®	<b>ET</b>	150gr. Spitzer	3.300"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	3.330"	0.456	0.266

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	64.8 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Norma MRP</b>	57.0	MAX.	2856	97%
	55.0	*	2736	93%
	53.0		2616	90%
<b>Hunter</b>	57.5	* MAX.	2928	91%
	55.5		2870	88%
	53.5		2812	85%
<b>PP 4000-MR</b>	57.0	* MAX.	2984	93%
	55.0		2887	89%
	53.0		2790	86%
<b>H4831SC</b>	60.5	* MAX.	2995	97%
	58.5		2886	94%
	56.5		2777	91%
<b>IMR 4955</b>	58.5	* MAX.	3006	97%
	56.5		2923	94%
	54.5		2840	91%
<b>RL17</b>	55.0	MAX.	3009	88%
	53.0		2900	85%
	51.0	*	2791	81%
<b>IMR 4350</b>	56.5	MAX.	3017	93%
	54.5	*	2907	90%
	52.5		2797	87%
<b>N165</b>	63.0	* MAX.	3055	** 108%
	61.0		2956	** 105%
	59.0		2857	** 101%
<b>RL22</b>	61.5	MAX.	3095	** 103%
	59.5		2988	100%
	57.5	*	2880	96%
<b>IMR 7828</b>	63.0	MAX.	3107	** 103%
	61.0		3015	100%
	59.0	*	2923	97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load