


Cartridge

280 Ack Imp - 160 grain

Version 9.0

NOSLER®

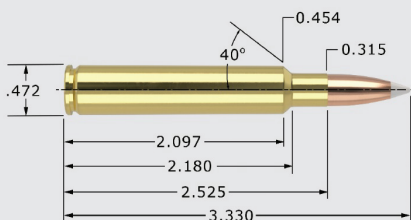

280 Ack Imp - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.	3.330"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®	AB	160gr. Spitzer	3.330"	0.531	0.283
Partition®	PT	160gr. Spitzer	3.330"	0.475	0.283

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	65.0 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	59.0 MAX.	2972	95%
Most Accurate	57.0	2893	91%
Powder Tested	55.0 *	2814	88%
N165	60.0 * MAX.	2985	** 103%
	58.0	2917	99%
	56.0	2849	96%
IMR 4350	55.5 * MAX.	3002	91%
	53.5	2910	88%
	51.5	2818	85%
IMR 4831	57.0 MAX.	3003	94%
	55.0 *	2941	90%
	53.0	2879	87%
RL23	58.5 * MAX.	3011	100%
	56.5	2910	97%
	54.5	2808	93%
Norma MRP	60.0 MAX.	3012	** 101%
	58.0	2954	98%
	56.0 *	2895	95%
RL19	59.0 * MAX.	3016	99%
	57.0	2958	95%
	55.0	2900	92%
RL22	60.5 MAX.	3025	** 101%
	58.5	2956	98%
	56.5 *	2887	94%
IMR 7828	61.5 MAX.	3043	** 101%
	59.5	2950	97%
	57.5 *	2856	94%
N560	59.5 MAX.	3044	** 102%
	57.5	2951	98%
	55.5 *	2858	95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load