


Cartridge

280 Ack Imp - 168 grain

Version 9.0

NOSLER®

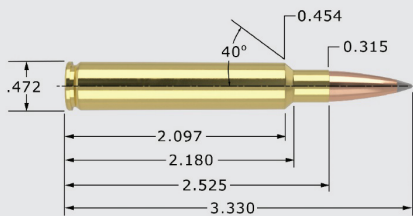

280 Ack Imp - 168 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.			3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	168gr. Spitzer	3.330"	0.616	0.298	
Custom Competition®	CC	168gr. HPBT	3.330"	0.520	0.298	
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210		
CASE HOLDS:	65.6	Gr. WATER	BARREL Length/Make	24" Lo. Walther		
			BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4350	54.0	MAX. 2853		87%		
	52.0 *	2760		84%		
	50.0	2667		81%		
IMR 4831	56.0	MAX. 2860		91%		
	54.0	2755		88%		
	52.0 *	2651		85%		
RL22	57.5	MAX. 2860		95%		
	55.5	2774		92%		
	53.5 *	2688		89%		
RL17	54.0	* MAX. 2861		85%		
	52.0	2774		82%		
	50.0	2687		79%		
N165	60.0	MAX. 2888		**	102%	
	58.0 *	2757		98%		
	56.0	2626		95%		
Norma MRP	59.0	MAX. 2906		99%		
	57.0 *	2798		95%		
	55.0	2690		92%		
Hunter	60.0	MAX. 2922		94%		
	58.0	2848		91%		
	56.0 *	2774		88%		
RL19	59.0	MAX. 2930		98%		
	57.0	2823		94%		
	55.0 *	2716		91%		
PP 4000-MR	57.0	MAX. 2931		91%		
	Most Accurate	55.0 *	2826	88%		
	Powder Tested	53.0	2721	85%		
N560	60.0	MAX. 2968		**	102%	
	58.0 *	2878		98%		
	56.0	2788		95%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load