


# Cartridge

## 280 Ack Imp - 175 grain

Version 9.0

# NOSLER®

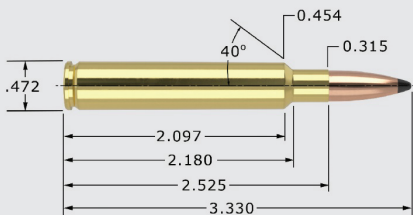

## 280 Ack Imp - 175 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b>	175gr. Spitzer	3.330"	0.648	0.310
Partition®	<b>PT</b>	175gr. Spitzer	3.330"	0.519	0.310
CASE TYPE:	Nosler		PRIMER TYPE	WLR	
CASE HOLDS:	64.9	Gr. WATER	BARREL Length/Make	24" H-S Prec.	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4350</b>	51.0 * MAX.	2717	84%		
	49.0	2626	81%		
	47.0	2536	77%		
<b>H4831</b>	55.5 MAX.	2729	89%		
	53.5	2626	86%		
	51.5 *	2523	83%		
<b>IMR 4831</b>	54.0 MAX.	2750	89%		
	52.0 *	2656	86%		
	50.0	2561	82%		
<b>RL23</b>	55.5 MAX.	2764	95%		
	53.5	2680	92%		
	51.5 *	2596	88%		
<b>IMR 7828 SSC</b> Most Accurate Powder Tested	58.0 MAX.	2772	92%		
	56.0 *	2677	89%		
	54.0	2582	86%		
<b>RL22</b>	55.5 MAX.	2789	93%		
	53.5 *	2700	90%		
	51.5	2610	86%		
<b>Norma MRP</b>	57.5 * MAX.	2798	97%		
	55.5	2698	94%		
	53.5	2598	91%		
<b>IMR 7977</b>	61.0 MAX.	2802	** 101%		
	59.0 *	2718	98%		
	57.0	2634	94%		
<b>H1000</b>	61.0 * MAX.	2843	99%		
	59.0	2743	96%		
	57.0	2643	93%		
<b>RL26</b>	59.5 MAX.	2903	94%		
	57.5	2800	90%		
	55.5 *	2697	87%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load