


Cartridge

280 Ack Imp - 185 grain

Version 9.0

NOSLER®

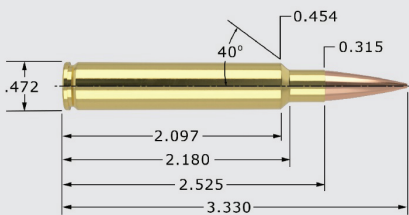

280 Ack Imp - 185 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.			3.330"	TESTED O.A.C.L.	B.C.	S.D.	
Reduced Drag Factor™			RDF	185gr. HPBT	3.330"	0.719	0.328
CASE TYPE:		Nosler	PRIMER TYPE		WLR		
CASE HOLDS:		60.1 Gr. WATER	BARREL Length/Make		26" Wiseman		
			BARREL Twist		1-9"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
N160	54.5	MAX.	2680	** 101%			
	52.5	*	2572	97%			
	50.5		2465	93%			
H4831	54.0	MAX.	2689	94%			
	52.0	*	2602	90%			
	50.0		2516	87%			
N165	58.0	MAX.	2724	** 107%			
	56.0	*	2630	** 104%			
	54.0		2536	100%			
IMR 7828 SSC	57.0	* MAX.	2749	98%			
	55.0		2650	94%			
	53.0		2550	91%			
RL23 Most Accurate Powder Tested	55.5	MAX.	2765	** 103%			
	53.5	*	2677	99%			
	51.5		2588	95%			
RL22	55.0	* MAX.	2770	99%			
	53.0		2665	96%			
	51.0		2561	92%			
Norma MRP	57.0	MAX.	2781	** 104%			
	55.0	*	2680	** 101%			
	53.0		2580	97%			
H1000	61.5	* MAX.	2811	99%			
	56.5		2733	96%			
	54.5		2655	93%			
MAGPRO	62.0	MAX.	2820	** 106%			
	60.0	*	2736	** 103%			
	58.0		2652	99%			
RL26	58.5	* MAX.	2842	** 106%			
	56.5		2739	** 103%			
	54.5		2637	99%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load