


Cartridge

280 Rem - 120 grain

Version 9.0

NOSLER®

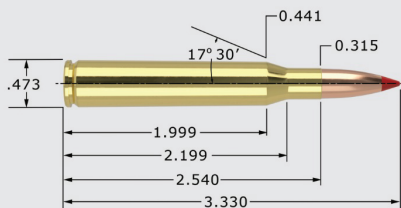

280 Rem - 120 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®		BT	120gr. Spitzer	3.330"	0.417 0.213
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210	
CASE HOLDS:	65.4	Gr. WATER	BARREL Length/Make	26" Lilja	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4831	57.0 * MAX.	3080	93%		
	55.0	2930	90%		
	53.0	2780	87%		
IMR 4064	48.0	MAX. 3150	81%		
	46.0	2967	78%		
	44.0 *	2785	74%		
H4895	47.5	MAX. 3198	80%		
	45.5	3103	76%		
	43.5 *	3008	73%		
IMR 4350	56.0	MAX. 3223	92%		
	54.0	3105	88%		
	52.0 *	2988	85%		
RL15	50.0 * MAX.	3240	80%		
	48.0	3150	76%		
	46.0	3060	73%		
RL19	57.5	MAX. 3250	96%		
	55.5	3130	92%		
	53.5 *	3010	89%		
Hunter	56.5	MAX. 3263	89%		
	54.5	3165	86%		
	52.5 *	3067	83%		
N160	59.0 * MAX.	3265	**	100%	
	57.0	3154		97%	
	55.0	3043		93%	
W760	54.5 * MAX.	3286		87%	
Most Accurate	52.5	3193		84%	
Powder Tested	50.5	3100		81%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load