


Cartridge

280 Rem - 140 grain

Version 9.0

NOSLER®

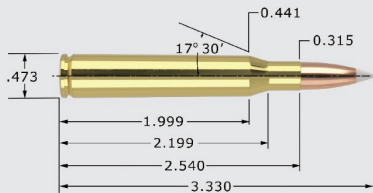

280 Rem - 140 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.330"	0.485	0.248
Ballistic Tip®	BT	140gr. Spitzer	3.330"	0.485	0.248
CT® Ballistic Silvertip®	BST	140gr. Spitzer	3.330"	0.485	0.248
Expansion Tip®	ET	140gr. Spitzer	3.300"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	140gr. Spitzer	3.300"	0.434	0.248

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	62.6 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4895	44.0 * MAX.	2840	76%
	42.0	2710	73%
	40.0	2580	70%
Varget	45.0 MAX.	2850	78%
	43.0	2753	74%
	41.0 *	2655	71%
N160	54.0 MAX.	2954	96%
	52.0	2830	92%
	50.0 *	2706	89%
IMR 4350	52.0 MAX.	2975	89%
	50.0 *	2877	85%
	48.0	2779	82%
Big Game	50.5 MAX.	2978	82%
	48.5	2863	79%
	46.5 *	2748	76%
H4831SC	57.0 MAX.	3005	95%
	55.0 *	2917	92%
	53.0	2829	88%
W760	52.0 MAX.	3059	87%
	50.0	2961	84%
	48.0 *	2863	80%
IMR 4831	56.0 MAX.	3067	96%
	54.0	2957	92%
	52.0 *	2847	89%
RL19	57.0 MAX.	3152	99%
Most Accurate	55.0	3027	95%
Powder Tested	53.0 *	2902	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load