


Cartridge

280 Rem - 160 grain

Version 9.0

NOSLER®

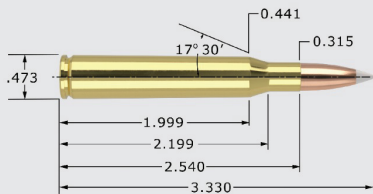

280 Rem - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	160gr. Spitzer	3.330"	0.531	0.283
Partition®	PT	160gr. Spitzer	3.330"	0.475	0.283
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210	
CASE HOLDS:	61.5	Gr. WATER	BARREL Length/Make	26" Lilja	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 7828	54.5 * MAX.	2751	94%		
	52.5	2661	91%		
	50.5	2570	87%		
H414	47.5 * MAX.	2760	80%		
	45.5	2668	77%		
	43.5	2576	74%		
N165	55.0 MAX.	2788	99%		
	53.0	2697	96%		
	51.0 *	2607	92%		
H4831SC	54.0 MAX.	2798	91%		
	52.0	2712	88%		
	50.0 *	2627	85%		
IMR 4350	50.5 * MAX.	2810	88%		
	48.5	2700	84%		
	46.5	2590	81%		
RL19	53.0 MAX.	2818	94%		
Most Accurate	51.0 *	2722	90%		
Powder Tested	49.0	2626	87%		
Hunter	51.5 MAX.	2826	86%		
	49.5 *	2737	83%		
	47.5	2649	80%		
RL22	54.0 MAX.	2876	95%		
	52.0 *	2784	92%		
	50.0	2693	88%		
IMR 4831	54.0 MAX.	2886	94%		
	52.0	2787	90%		
	50.0 *	2688	87%		
MAGPRO	61.5 MAX.	2932	**	103%	
	59.5 *	2859	100%		
	57.5	2785	96%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load