


CARTRIDGE

284 Winchester - 150 grain

Version 8.3

Nosler®

UP FRONT

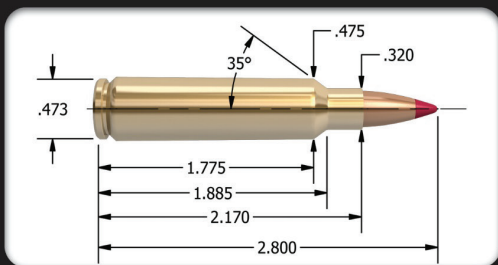

284 Winchester - 150 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.800"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	150gr. Spitzer	2.800"	0.493	0.266
AccuBond® Long Range	150gr. Spitzer	2.800"	0.546	0.266
Ballistic Tip®	150gr. Spitzer	2.800"	0.493	0.266
CT® Ballistic Silvertip®	150gr. Spitzer	2.800"	0.493	0.266
E-Tip®	150gr. Spitzer	2.780"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	150gr. Spitzer	2.800"	0.456	0.266
CASE TYPE:	Winchester	PRIMER TYPE	Fed 210	
CASE HOLDS:	57.6 Gr. WATER	BARREL Length/Make	24" Lilja	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831 Most Accurate Powder Tested	56.0 * MAX.	2730	** 101%
	54.0	2623	98%
	52.0	2515	94%
RL15	46.0 * MAX.	2736	83%
	44.0	2627	80%
	42.0	2518	76%
IMR 4350	49.5 MAX.	2741	91%
	47.5 *	2647	87%
	45.5	2552	84%
W760	50.0 MAX.	2759	91%
	48.0	2636	87%
	46.0 *	2514	84%
RL19	54.5 MAX.	2780	** 103%
	52.5	2668	99%
	50.5 *	2556	95%
Big Game	51.0 * MAX.	2870	93%
	49.0	2758	90%
	47.0	2677	86%
Viht N550	51.0 MAX.	2879	98%
	49.0 *	2769	95%
	47.0	2671	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load