


CARTRIDGE

30-06 Springfield Ackley Improved - 125 grain

Version 8.0

Nosler

UP FRONT

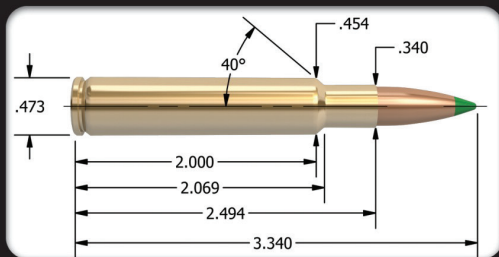

30-06 Springfield A.I. - 125 grain

30 Cal. (.308")

MAXIMUM O.A.C.L. 3.340"

B.C. S.D.

AccuBond®	125gr. Spitzer	0.366	0.188
Ballistic Tip®	125gr. Spitzer	0.366	0.188

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	69.1 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H414	62.5 MAX.	3215	94%
	60.5	3127	91%
	58.5 *	3038	88%
IMR 4350	64.0 MAX.	3279	98%
	62.0	3161	95%
	60.0 *	3042	92%
RL15	55.5 MAX.	3286	84%
	53.5	3179	81%
	51.5 *	3072	78%
W760 Most Accurate Powder Tested	63.0 * MAX.	3309	95%
	61.0	3198	92%
	59.0	3087	89%
RL19	67.0 MAX.	3316	** 105%
	65.0	3219	** 102%
	63.0 *	3121	99%
Viht N150	58.0 MAX.	3316	99%
	56.0	3229	95%
	54.0 *	3141	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load