


CARTRIDGE

30-06 Springfield Ackley Improved-150/155 grain

Version 8.0

Nosler

UP FRONT

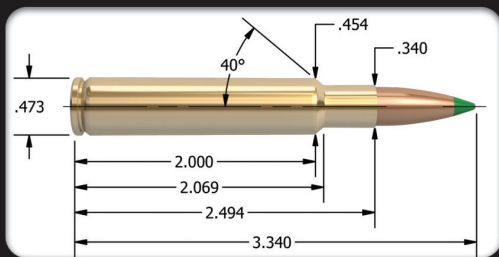

30-06 Springfield A.I. - 150/155 grain 30 Cal. (.308")

MAXIMUM O.A.C.L. 3.340"

B.C. S.D.

			B.C.	S.D.
AccuBond®	150gr. Spitzer		0.435	0.226
Ballistic Tip®	150gr. Spitzer		0.435	0.226
CT® Ballistic Silvertip®	150gr. Spitzer		0.435	0.226
E-Tip®	150gr. Spitzer		0.469	0.226
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	150gr. Spitzer		0.387	0.226
Custom Competition®	155gr. HPBT		0.450	0.233

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	66.0 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H414	60.0 * MAX.	3001	95%
	58.0	2905	92%
	56.0	2810	88%
RL15	53.5 MAX.	3036	84%
	51.5	2934	81%
	49.5 *	2832	78%
Viht N150	55.0 MAX.	3038	98%
	53.0	2920	94%
	51.0 *	2802	91%
RL19 Most Accurate Powder Tested	63.0 * MAX.	3058	** 104%
	61.0	2947	100%
	59.0	2835	97%
IMR 4350	61.5 * MAX.	3071	99%
	59.5	2963	95%
	57.5	2854	92%
W760	60.0 * MAX.	3075	95%
	58.0	2968	92%
	56.0	2861	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load