


CARTRIDGE

30-06 Springfield Ackley Improved - 165/168 grain Version 8.3

Nosler

UP FRONT

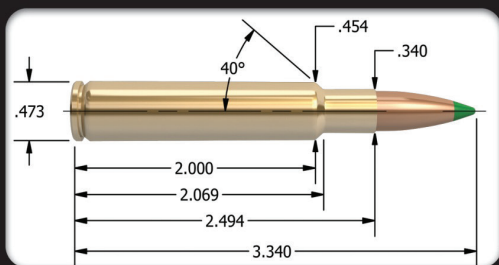

30-06 Springfield A.I. - 165/168 grain 30 Cal. (.308")

MAXIMUM O.A.C.L. 3.340"

B.C. S.D.

		B.C.	S.D.
AccuBond®	165gr. Spitzer	0.475	0.248
Ballistic Tip®	165gr. Spitzer	0.475	0.248
Partition®	165gr. Spitzer	0.410	0.248
AccuBond® Long Range	168gr. Spitzer	0.505	0.253
Ballistic Tip®	168gr. Spitzer	0.490	0.253
Bonded Solid Base®	168gr. PPT	0.350	0.253
CT® Ballistic Silvertip®	168gr. Spitzer	0.490	0.253
Custom Competition®	168gr. HPBT	0.462	0.253
E-Tip®	168gr. Spitzer	0.503	0.253

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	65.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H414	58.0 * MAX.	2881	92%
	56.0	2796	89%
	54.0	2711	86%
Viht N160	60.0 MAX.	2912	** 102%
	58.0	2817	99%
	56.0 *	2722	95%
H4831 Most Accurate Powder Tested	62.5 * MAX.	2918	100%
	60.5	2824	96%
	58.5	2730	93%
RL19	60.5 MAX.	2936	** 101%
	58.5	2823	97%
	56.5 *	2710	94%
IMR 4350	59.0 MAX.	2940	95%
	57.0	2838	92%
	55.0 *	2736	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load