


CARTRIDGE

30-06 Springfield Ackley Improved - 175/180 grain Version 8.3

Nosler®

UP FRONT

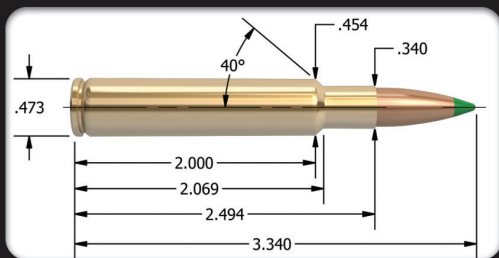

30-06 Springfield A.I. - 175/180 grain 30 Cal. (.308")

MAXIMUM O.A.C.L. 3.340"

B.C. S.D.

Custom Competition®	175gr. HPBT		0.505	0.264
Reduced Drag Factor™	175gr. HPBT		0.536	0.264
AccuBond®	180gr. Spitzer		0.507	0.271
Ballistic Tip®	180gr. Spitzer		0.507	0.271
CT® Ballistic Silvertip®	180gr. Spitzer		0.507	0.271
E-Tip®	180gr. Spitzer		0.523	0.271
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	180gr. PPT		0.361	0.271
Partition®	180gr. Spitzer		0.474	0.271

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	64.1 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H414	57.5 MAX.	2787	93%
	55.5	2705	90%
	53.5 *	2622	87%
H4831	60.0 * MAX.	2798	98%
	58.0	2708	94%
	56.0	2618	91%
Viht N165	63.0 MAX.	2812	** 109%
	61.0	2723	** 106%
	59.0 *	2633	** 102%
IMR 4350	56.5 MAX.	2835	93%
	54.5	2719	90%
	52.5 *	2602	87%
RL22 Most Accurate Powder Tested	62.0 MAX.	2985	** 105%
	60.0	2881	** 102%
	58.0 *	2779	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load