


# Cartridge

30-06 Sprg - 125 grain

Version 9.0

# NOSLER®

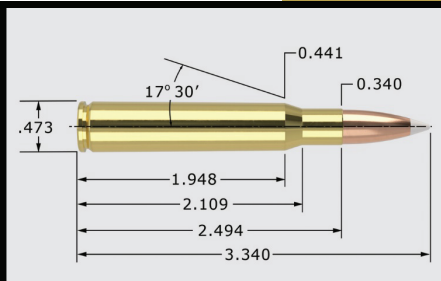

30-06 Sprg - 125 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b> 125gr. Spitzer	3.320"	0.366	0.188
Ballistic Tip®	<b>BT</b> 125gr. Spitzer	3.320"	0.366	0.188

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	67.7 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>IMR 4831</b>	61.5 * MAX.	3112	97%	
	59.5	3027	94%	
	57.5	2942	91%	
<b>H414</b>	60.0 MAX.	3138	92%	
	58.0	3033	89%	
	56.0 *	2928	86%	
<b>IMR 4350</b>	60.5 MAX.	3173	96%	
	58.5	3060	92%	
	56.5 *	2947	89%	
<b>W760</b>	61.0 MAX.	3179	94%	
	59.0	3094	91%	
	57.0 *	3009	88%	
<b>H4895</b>	52.5 MAX.	3200	85%	
	50.5	3110	82%	
	48.5 *	3020	79%	
<b>N140</b>	55.0 MAX.	3245	94%	
	53.0	3156	91%	
	51.0 *	3068	88%	
<b>Big Game</b>	61.0 MAX.	3257	92%	
	59.0 *	3181	89%	
	57.0	3105	86%	
<b>N150</b>	57.0 MAX.	3309	99%	
	55.0	3215	96%	
	53.0 *	3122	92%	
<b>RL15</b>	56.0 MAX.	3331	86%	
	Most Accurate	54.0	3230	83%
	Powder Tested	52.0 *	3130	80%
<b>Varget</b>	57.5 MAX.	3409	92%	
	55.5 *	3285	89%	
	53.5	3162	85%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load