


Cartridge

30-06 Sprg - 175/180 grain

Version 9.0

NOSLER®

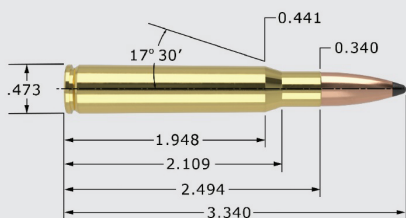

30-06 Sprg - 175/180 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	175gr. HPBT	3.330"	0.505	0.264
Reduced Drag Factor™	RDF	175gr. HPBT	3.330"	0.536	0.264
AccuBond®	AB	180gr. Spitzer	3.330"	0.507	0.271
Ballistic Tip®	BT	180gr. Spitzer	3.330"	0.507	0.271
CT® Ballistic Silvertip®	BST	180gr. Spitzer	3.330"	0.507	0.271
Expansion Tip®	ET	180gr. Spitzer	3.300"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	180gr. PPT	3.210"	0.361	0.271
Partition®	PT	180gr. Spitzer	3.310"	0.474	0.271

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	63.9 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Norma 204	59.0 * MAX. 2729		** 103%
	57.0 2642		99%
	55.0 2555		96%
RL17	55.0 * MAX. 2732		89%
	53.0 2575		86%
	51.0 2418		83%
IMR 4350	56.5 * MAX. 2736		95%
	54.5 2633		91%
	52.5 2530		88%
RL19	60.0 * MAX. 2748		** 102%
	58.0 2665		99%
	56.0 2582		95%
PP 4000-MR	57.5 MAX. 2756		95%
	55.5 2653		91%
	53.5 * 2549		88%
H4831	62.0 MAX. 2758		** 101%
	60.0 * 2675		98%
	58.0 2593		95%
Hybrid 100V	56.0 * MAX. 2771		90%
	54.0 2694		87%
	52.0 2617		84%
W760	55.5 * MAX. 2773		91%
	53.5 2685		88%
	51.5 2597		84%
H4350	56.5 MAX. 2774		94%
	54.5 2669		90%
	52.5 * 2565		87%
RL22	62.0 * MAX. 2819		** 105%
Most Accurate	60.0 2734		** 102%
Powder Tested	58.0 2648		99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load