


Cartridge

30-06 Sprg - 200 grain

Version 9.0

NOSLER®

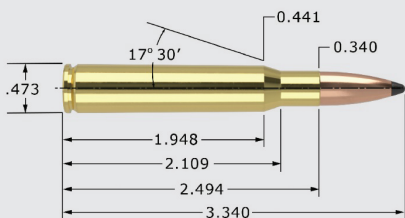

30-06 Sprg - 200 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.320"	0.588	0.301
Partition®	PT	200gr. Spitzer	3.320"	0.481	0.301
CASE TYPE:	Nosler	PRIMER TYPE	WLR		
CASE HOLDS:	59.4 Gr. WATER	BARREL Length/Make	24" Lilja		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4320	47.0 * MAX.	2438	86%		
		2343	82%		
	43.0	2248	79%		
IMR 4350	53.0 MAX.	2528	95%		
		2443	92%		
	49.0 *	2358	88%		
IMR 4831	55.0 MAX.	2558	99%		
		2463	95%		
	51.0 *	2368	92%		
H414	53.0 * MAX.	2560	93%		
		2450	89%		
	49.0	2340	86%		
W760	52.0 * MAX.	2568	92%		
		2453	88%		
	48.0	2338	85%		
Hunter	54.5 MAX.	2593	95%		
	52.5 *	2528	91%		
	50.5	2464	88%		
RL19 Most Accurate Powder Tested	56.0 MAX.	2620	**	102%	
	54.0	2520		99%	
	52.0 *	2420		95%	
N160	57.0 MAX.	2632	**	107%	
	55.0	2544	**	103%	
	53.0 *	2457		99%	
RL22	58.0 MAX.	2688	**	106%	
	56.0	2603	**	102%	
	54.0 *	2518		99%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load