


# Cartridge

30-30 Win - 150 grain

Version 9.0

# NOSLER<sup>®</sup>

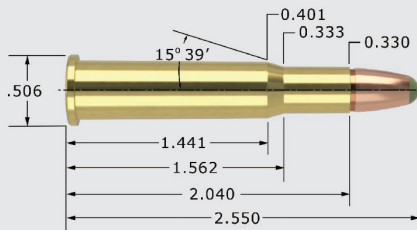

30-30 Win - 150 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	2.550"	TESTED O.A.C.L.	B.C.	S.D.
CT <sup>®</sup> Ballistic Silvertip <sup>®</sup>	<b>BST</b> 150gr. RNBT	2.550"	0.232	0.226
Expansion Tip <sup>®</sup>	<b>ET</b> 150gr. RNBT	2.500"	0.344	0.226

Due to internal construction differences, always begin with starting loads when using Expansion Tip<sup>®</sup> products.

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	36.6 Gr. WATER	BARREL Length/Make	20" Wiseman
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>TAC</b>	31.5 MAX. 2147		87%
	29.5 * 2065		82%
	27.5 1982		76%
<b>W748</b>	35.0 * MAX. 2178		100%
	33.0 2033		94%
	31.0 1888		88%
<b>H4895</b>	33.0 * MAX. 2183		99%
	31.0 2049		93%
	29.0 1914		87%
<b>AA 2460</b>	34.0 * MAX. 2193		94%
	32.0 2070		88%
	30.0 1947		83%
<b>Varget</b>	34.5 * MAX. 2206		** 102%
	32.5 2086		96%
	30.5 1967		90%
<b>IMR 4895</b>	32.0 MAX. 2247		95%
	Most Accurate 30.0 2133		89%
	Powder Tested 28.0 * 2020		83%
<b>IMR 3031</b>	31.0 * MAX. 2255		94%
	29.0 2118		88%
	27.0 1981		82%
<b>IMR 4198</b>	26.0 MAX. 2260		82%
	24.0 2110		76%
	22.0 * 1960		70%
<b>IMR 4320</b>	34.0 MAX. 2268		** 101%
	32.0 2163		95%
	30.0 * 2058		89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load