


Cartridge

30-378 Wby Mag - 150/155 grain

Version 9.0

NOSLER®

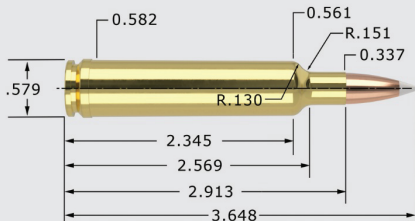

30-378 Wby Mag - 150/155 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.648"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.630"	0.435	0.226
Ballistic Tip®	BT	150gr. Spitzer	3.630"	0.435	0.226
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.630"	0.435	0.226
Expansion Tip®	ET	150gr. Spitzer	3.600"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.630"	0.387	0.226
Custom Competition®	CC	155gr. HPBT	3.630"	0.450	0.233

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	124.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H1000	105.0 MAX.	3394	90%
	103.0	3327	88%
	101.0 *	3260	86%
RL22	97.0 * MAX.	3446	85%
	95.0	3382	83%
	93.0	3318	82%
H50BMG	120.0 MAX.	3449	100%
	Most Accurate	3397	99%
	Powder Tested	116.0 * 3345	97%
IMR 7828	102.0 MAX.	3498	88%
	100.0	3425	86%
	98.0 *	3351	84%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load