


Cartridge

30-378 Wby Mag - 165/168 grain

Version 9.0

NOSLER®

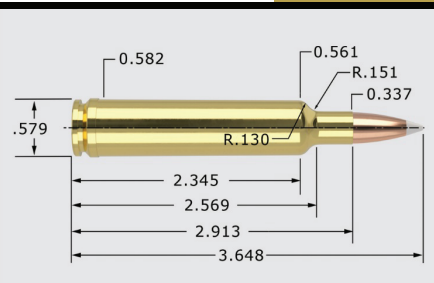

30-378 Wby Mag - 165/168 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.648"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	165gr. Spitzer	3.630"	0.475	0.248
Ballistic Tip®	BT	165gr. Spitzer	3.630"	0.475	0.248
Partition®	PT	165gr. Spitzer	3.630"	0.410	0.248
AccuBond® Long Range	ABLR	168gr. Spitzer	3.630"	0.525	0.253
Ballistic Tip®	BT	168gr. Spitzer	3.630"	0.490	0.253
Bonded Solid Base®	BSB	168gr. PPT	3.410"	0.350	0.253
CT® Ballistic Silvertip®	BST	168gr. Spitzer	3.630"	0.490	0.253
Custom Competition®	CC	168gr. HPBT	3.630"	0.462	0.253
Expansion Tip®	ET	168gr. Spitzer	3.600"	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Reduced Drag Factor™	RDF	168gr. HPBT	3.630"	0.505	0.253

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	122.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H1000	99.5 * MAX.	3257		86%
		3203		85%
		3150		83%
RL22	94.0 * MAX.	3336		84%
		3280		82%
		3224		80%
H50BMG	116.0 MAX.	3337		99%
	Most Accurate	3289		97%
	Powder Tested	112.0 * 3242		95%
IMR 7828	99.0 MAX.	3378		86%
		3307		85%
		95.0 * 3237		83%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load