


Cartridge

30-378 Wby Mag - 175/180 grain

Version 9.0

NOSLER®

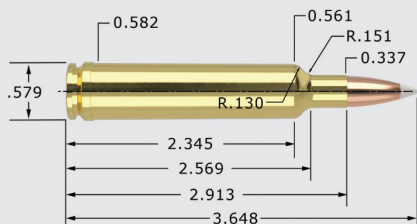

30-378 Wby Mag - 175/180 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.648"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	175gr. HPBT	3.630"	0.505	0.264
Reduced Drag Factor™	RDF	175gr. HPBT	3.630"	0.536	0.264
AccuBond®	AB	180gr. Spitzer	3.630"	0.507	0.271
Ballistic Tip®	BT	180gr. Spitzer	3.630"	0.507	0.271
CT® Ballistic Silvertip®	BST	180gr. Spitzer	3.630"	0.507	0.271
Expansion Tip®	ET	180gr. Spitzer	3.600"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	180gr. PPT	3.600"	0.361	0.271
Partition®	PT	180gr. Spitzer	3.630"	0.474	0.271

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	121.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL22	89.5 MAX.	3146	80%
		3085	79%
	85.5 *	3024	77%
H1000	100.0 MAX.	3187	87%
		3128	86%
	96.0 *	3070	84%
H50BMG	114.0 MAX.	3248	98%
	Most Accurate	3203	96%
	Powder Tested	110.0 * 3158	94%
IMR 7828	97.0 MAX.	3264	85%
		3190	84%
	93.0 *	3115	82%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load