


# Cartridge

## 30-378 Wby Mag - 190 grain

Version 9.0

# NOSLER®

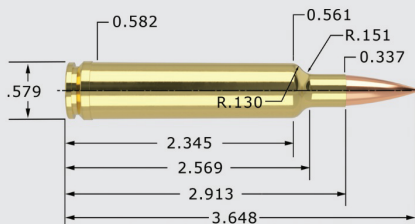

## 30-378 Wby Mag - 190 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.648"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b> 190gr. Spitzer	3.630"	0.597	0.286
Custom Competition®	<b>CC</b> 190gr. HPBT	3.630"	0.530	0.286

CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	121.9 Gr. WATER	BARREL Length/Make	26" Pac-Nor	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H50BMG</b>	118.0 MAX. 3228		100%
	116.0 * 3188		99%
	114.0 3149		97%
<b>IMR 7828 SSC</b>	97.5 * MAX. 3274		82%
	95.5 3215		81%
	93.5 3157		79%
<b>H1000</b>	104.0 * MAX. 3305		90%
	102.0 3215		89%
	100.0 3125		87%
<b>Retumbo</b>	106.0 MAX. 3309		94%
	104.0 3247		92%
	102.0 * 3186		90%
<b>RL33</b>	113.0 MAX. 3331		95%
	Most Accurate 111.0 3272		93%
	Powder Tested 109.0 * 3213		91%
<b>US869</b>	120.0 MAX. 3331		** 101%
	118.0 3272		99%
	116.0 * 3214		98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load