


# CARTRIDGE

**30-40 Krag - 150/155 grain**

**Version 8.0**

# Nosler®

UP FRONT

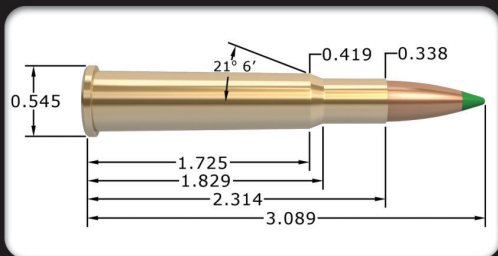

**30-40 Krag - 150/155 grain**

**30 Cal. (.308")**

**MAXIMUM S.A.A.M.I. O.A.C.L. 3.089"**

**B.C. S.D.**

AccuBond®	150gr. Spitzer		0.435	0.226
Ballistic Tip®	150gr. Spitzer		0.435	0.226
CT® Ballistic Silvertip®	150gr. Spitzer		0.435	0.226
E-Tip®	150gr. Spitzer		0.469	0.226

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

Partition®	150gr. Spitzer		0.387	0.226
Custom Competition®	155gr. HPBT		0.450	0.226

CASE TYPE:	Remington	PRIMER TYPE	CCI 200
CASE HOLDS:	53.5 Gr. WATER	BARREL Length/Make	30" Spfld M1898
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)
<b>IMR 4895</b> Most Accurate Powder Tested	40.0 MAX.	2400			82%
	38.0	2300			78%
	36.0 *	2200			74%
<b>IMR 3031</b>	40.0 MAX.	2520			84%
	38.0	2410			80%
	36.0 *	2300			76%
<b>IMR 4831</b>	51.0 * MAX.	2580		**	101%
	49.0	2450			97%
	47.0	2320			93%
<b>IMR 4350</b>	50.0 * MAX.	2710			99%
	48.0	2580			95%
	46.0	2450			91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load