


# CARTRIDGE

**30-40 Krag - 165/168 grain**

**Version 8.0**

# Nosler

UP FRONT

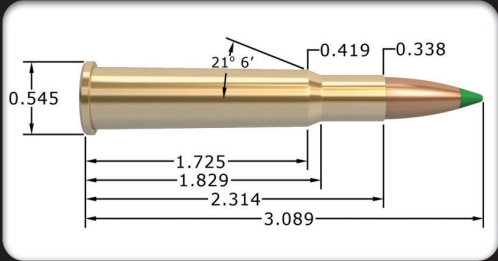

**30-40 Krag - 165/168 grain**

**30 Cal. (.308")**

**MAXIMUM S.A.A.M.I. O.A.C.L. 3.089"**

**B.C. S.D.**

AccuBond®	165gr. Spitzer	0.475	0.248
Ballistic Tip®	165gr. Spitzer	0.475	0.248
Partition®	165gr. Spitzer	0.410	0.248
AccuBond® Long Range	168gr. Spitzer	0.505	0.253
Ballistic Tip®	168gr. Spitzer	0.490	0.253
CT® Ballistic Silvertip®	168gr. Spitzer	0.490	0.253
Custom Competition®	168gr. HPBT	0.462	0.253
E-Tip®	168gr. Spitzer	0.503	0.253

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

CASE TYPE:	Remington	PRIMER TYPE	CCI 200
CASE HOLDS:	52.8 Gr. WATER	BARREL Length/Make	30" Spfld M1898
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4895</b> Most Accurate Powder Tested	38.0 * MAX.	2258	79%
	36.0	2163	75%
	34.0	2068	71%
<b>IMR 3031</b>	38.0 MAX.	2350	81%
	36.0	2240	77%
	34.0 *	2130	73%
<b>IMR 4831</b>	49.0 * MAX.	2430	99%
	47.0	2300	95%
	45.0	2170	91%
<b>IMR 4350</b>	48.0 MAX.	2570	96%
	46.0	2430	92%
	44.0 *	2290	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested  
 \*\* = Compressed load