


# CARTRIDGE

**30-40 Krag - 175/180 grain**

**Version 8.0**

# Nosler®

UP FRONT

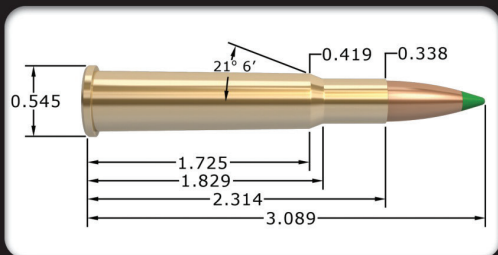

**30-40 Krag - 175/180 grain**

**30 Cal. (.308")**

**MAXIMUM S.A.A.M.I. O.A.C.L. 3.089"**

**B.C. S.D.**

Custom Competition®	175gr. HPBT		0.505	0.264
AccuBond®	180gr. Spitzer		0.507	0.271
Ballistic Tip®	180gr. Spitzer		0.507	0.271
CT® Ballistic Silvertip®	180gr. Spitzer		0.507	0.271
E-Tip®	180gr. Spitzer		0.523	0.271
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	180gr. Spitzer		0.474	0.271
Partition®	180gr. PPT		0.361	0.271

CASE TYPE:	Remington	PRIMER TYPE	CCI 200
CASE HOLDS:	50.9 Gr. WATER	BARREL Length/Make	30" Spfld M1898
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 3031</b>	36.0 MAX.	2200		80%
	34.0	2100		75%
	32.0 *	2000		71%
<b>IMR 4895</b>	37.0 * MAX.	2200		80%
	35.0	2090		76%
	33.0	1980		71%
<b>IMR 4831</b>	47.0 MAX.	2370		98%
	45.0	2230		94%
	43.0 *	2090		90%
<b>IMR 4350</b> Most Accurate Powder Tested	46.0 MAX.	2460		96%
	44.0	2330		91%
	42.0 *	2190		87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.™

\* = Most accurate load tested

\*\* = Compressed load