


# Cartridge

## 30 Nosler - 150/155 grain

Version 9.0

# NOSLER®

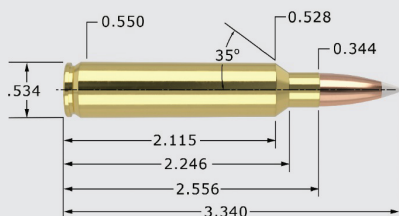

## 30 Nosler - 150/155 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	3.340"	0.435	0.226
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	3.340"	0.435	0.226
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	3.340"	0.435	0.226
Expansion Tip®	<b>ET</b>	150gr. Spitzer	3.320"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	3.340"	0.387	0.226
Custom Competition®	<b>CC</b>	155gr. HPBT	3.340"	0.450	0.233

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	88.1 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 7828 SSC</b>	81.0 MAX. 3321		95%
	79.0 * 3199		92%
	77.0 3077		90%
<b>H4831SC</b>	82.5 MAX. 3356		98%
	80.5 * 3264		95%
	78.5 3172		93%
<b>IMR 7977</b>	83.0 MAX. 3393		** 101%
	Most Accurate 81.0 * 3281		99%
	Powder Tested 79.0 3168		96%
<b>RL22</b>	81.0 * MAX. 3406		100%
	79.0 3317		97%
	77.0 3228		95%
<b>MAGPRO</b>	87.5 MAX. 3407		** 102%
	85.5 3322		100%
	83.5 * 3238		98%
<b>RL25</b>	86.0 * MAX. 3414		** 106%
	84.0 3346		** 104%
	82.0 3278		** 101%
<b>H1000</b>	87.0 * MAX. 3440		** 104%
	85.0 3349		** 102%
	83.0 3258		100%
<b>Norma MRP</b>	82.5 MAX. 3464		** 103%
	80.5 3380		** 100%
	78.5 * 3297		98%
<b>RL26</b>	85.5 MAX. 3466		99%
	83.5 * 3364		97%
	81.5 3262		94%
<b>RL19</b>	83.0 * MAX. 3473		** 102%
	81.0 3365		100%
	79.0 3256		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load