


Cartridge

30 Nosler - 190 grain

Version 9.0

NOSLER®

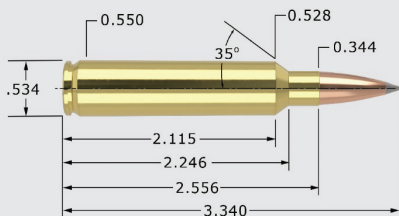

30 Nosler - 190 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 190gr. Spitzer	3.340"	0.597	0.286
Custom Competition®	CC 190gr. HPBT	3.340"	0.530	0.286

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	87.3 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC Most Accurate Powder Tested	79.0 MAX. 3078		94%
	77.0 2997		92%
	75.0 * 2915		89%
H1000	82.5 MAX. 3117		100%
	80.5 * 3039		98%
	78.5 2960		95%
Norma MRP	78.5 MAX. 3125		99%
	76.5 * 3037		96%
	74.5 2949		94%
IMR 7828 SSC	78.5 * MAX. 3126		93%
	76.5 3031		90%
	74.5 2936		88%
RL22	78.0 * MAX. 3129		97%
	76.0 3068		95%
	74.0 3008		92%
RL25	83.5 * MAX. 3152		** 104%
	81.5 3071		** 101%
	79.5 2991		99%
RL26	81.0 MAX. 3158		95%
	79.0 * 3052		92%
	77.0 2947		90%
Retumbo	86.5 * MAX. 3175		** 107%
	84.5 3104		** 104%
	82.5 3033		** 102%
MAGPRO	85.5 * MAX. 3185		** 101%
	83.5 3096		99%
	81.5 3007		96%
Magnum	87.5 * MAX. 3187		** 102%
	85.5 3115		99%
	83.5 3044		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load