


Cartridge

30 Nosler - 210 grain

Version 9.0

NOSLER®

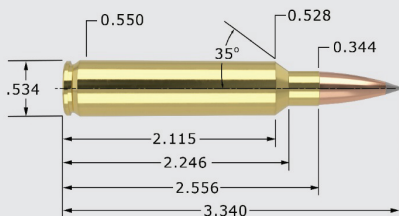

30 Nosler - 210 grain

30 Cal. (.308")

| MAXIMUM SAAMI O.A.C.L. | 3.340" | TESTED O.A.C.L. | B.C. | S.D. |
|------------------------|----------------------------|-----------------|-------|-------|
| AccuBond® Long Range | ABLR 210gr. Spitzer | 3.340" | 0.661 | 0.316 |
| Reduced Drag Factor™ | RDF 210gr. HPBT | 3.340" | 0.707 | 0.316 |

| | | | |
|-------------|----------------|--------------------|-------------|
| CASE TYPE: | Nosler | PRIMER TYPE | WLRM |
| CASE HOLDS: | 87.3 Gr. WATER | BARREL Length/Make | 26" Pac-Nor |
| | | BARREL Twist | 1-10" |

| POWDER TYPE | POWDER CHG. GRS. | MUZZLE VEL. F.P.S. | LOAD DENSITY (VOLUME) |
|----------------------------------------------------|------------------|--------------------|-----------------------|
| N165 | 76.0 MAX. 2924 | [Bar] | 97% |
| | 74.0 2824 | [Bar] | 94% |
| | 72.0 * 2724 | [Bar] | 92% |
| IMR 7828 SSC Most Accurate Powder Tested | 75.0 MAX. 2936 | [Bar] | 89% |
| | 73.0 * 2860 | [Bar] | 86% |
| | 71.0 2784 | [Bar] | 84% |
| H1000 | 79.0 MAX. 2944 | [Bar] | 96% |
| | 77.0 2870 | [Bar] | 93% |
| | 75.0 * 2796 | [Bar] | 91% |
| RL22 | 73.5 MAX. 2957 | [Bar] | 92% |
| | 71.5 * 2886 | [Bar] | 89% |
| | 69.5 2815 | [Bar] | 87% |
| Norma MRP | 76.0 MAX. 2962 | [Bar] | 96% |
| | 74.0 2895 | [Bar] | 93% |
| | 72.0 * 2827 | [Bar] | 91% |
| RL25 | 81.0 MAX. 2990 | [Bar] | ** 101% |
| | 79.0 * 2918 | [Bar] | 98% |
| | 77.0 2847 | [Bar] | 96% |
| Retumbo | 84.0 MAX. 3002 | [Bar] | ** 103% |
| | 82.0 * 2943 | [Bar] | ** 101% |
| | 80.0 2884 | [Bar] | 99% |
| MAGPRO | 81.5 MAX. 3007 | [Bar] | 96% |
| | 79.5 * 2927 | [Bar] | 94% |
| | 77.5 2847 | [Bar] | 92% |
| Magnum | 83.0 MAX. 3007 | [Bar] | 97% |
| | 81.0 2947 | [Bar] | 94% |
| | 79.0 * 2887 | [Bar] | 92% |
| RL26 | 79.0 MAX. 3015 | [Bar] | 92% |
| | 77.0 * 2924 | [Bar] | 90% |
| | 75.0 2833 | [Bar] | 88% |

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load