


CARTRIDGE

30 Thompson Center - 150/155 grain

Version 8.0

Nosler®

UP FRONT

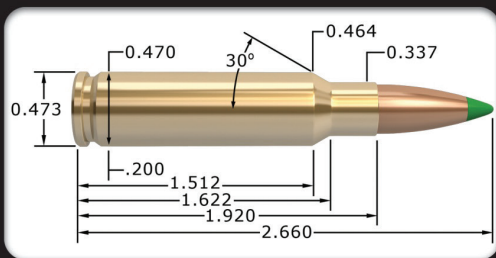

30 Thompson Center - 150/155 grain 30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.660"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	150gr. Spitzer	2.640"	0.435	0.226
Ballistic Tip®	150gr. Spitzer	2.640"	0.435	0.226
CT® Ballistic Silvertip®	150gr. Spitzer	2.640"	0.435	0.226
E-Tip®	150gr. Spitzer	2.600"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	150gr. Spitzer	2.590"	0.387	0.226
Custom Competition®	155gr. HPBT	2.640"	0.450	0.233

CASE TYPE:	Hornady		PRIMER TYPE	Fed. 210
CASE HOLDS:	48.5	Gr. WATER	BARREL Length/Make	24" Pac-Nor
			BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)
Varget	46.0 MAX.	2855		**	103%
	44.0 *	2734			98%
	42.0	2615			94%
IMR 4320 Most Accurate Powder Tested	46.0 MAX.	2870		**	102%
	44.0	2719			98%
	42.0 *	2568			93%
A-2460	44.0 MAX.	2905			92%
	42.0	2801			87%
	40.0 *	2699			83%
TAC	45.5 MAX.	2920			96%
	43.5	2826			92%
	41.5 *	2734			87%
A-2520	48.0 * MAX.	2985		**	102%
	46.0	2895			98%
	44.0	2797			94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load