


CARTRIDGE

30 Thompson Center - 165/168 grain

Version 8.0

Nosler

UP FRONT

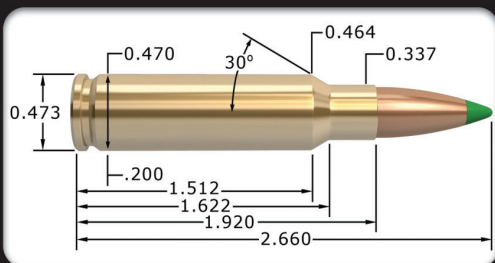

30 Thompson Center - 165/168 grain 30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.660"

TESTED O.A.C.L.

B.C.

S.D.

		TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	165gr. Spitzer	2.640"	0.475	0.248
Ballistic Tip®	165gr. Spitzer	2.640"	0.475	0.248
Partition®	165gr. Spitzer	2.590"	0.410	0.248
AccuBond® Long Range	168gr. Spitzer	2.640"	0.505	0.253
Ballistic Tip®	168gr. Spitzer	2.640"	0.490	0.253
CT® Ballistic Silvertip®	168gr. Spitzer	2.640"	0.490	0.253
Custom Competition®	168gr. HPBT	2.640"	0.462	0.253
E-Tip®	168gr. Spitzer	2.600"	0.503	0.253

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

CASE TYPE:	Hornady		PRIMER TYPE	Fed. 210
CASE HOLDS:	45.7	Gr. WATER	BARREL Length/Make	24" Pac-Nor
			BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	45.5 MAX.	2756	** 107%
	43.5 *	2638	** 102%
	41.5	2521	98%
Varget	45.5 MAX.	2768	** 108%
	43.5	2667	** 103%
	41.5 *	2563	98%
TAC	43.5 * MAX.	2770	97%
	41.5	2662	93%
	39.5	2550	88%
IMR 4895 Most Accurate Powder Tested	45.5 MAX.	2791	** 109%
	43.5 *	2681	** 105%
	41.5	2589	100%
A-2520	46.5 * MAX.	2824	** 105%
	44.5	2752	100%
	42.5	2682	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load