


CARTRIDGE

30 Thompson Center - 175/180 grain

Version 8.0

Nosler®

UP FRONT

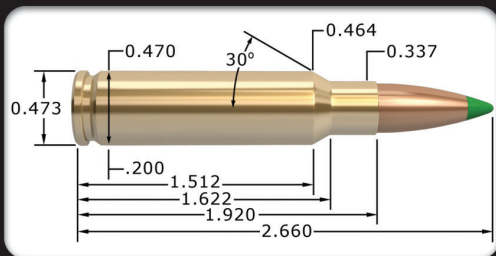

30 Thompson Center - 175/180 grain 30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.660"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	175gr. HPBT	2.640"	0.505	0.264
AccuBond®	180gr. Spitzer	2.640"	0.507	0.271
Ballistic Tip®	180gr. Spitzer	2.640"	0.507	0.271
CT® Ballistic Silvertip®	180gr. Spitzer	2.640"	0.507	0.271
E-Tip®	180gr. Spitzer	2.600"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	180gr. PPT	2.550"	0.361	0.271
Partition®	180gr. Spitzer	2.590"	0.474	0.271

CASE TYPE:	Hornady	PRIMER TYPE	Fed. 210
CASE HOLDS:	43.5 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	44.0 MAX.	2648	** 109%
	42.0 *	2568	** 104%
	40.0	2490	99%
TAC	42.5 MAX.	2649	100%
	40.5	2573	95%
	38.5 *	2498	90%
IMR 4895	44.0 MAX.	2666	** 111%
	42.0	2588	** 106%
	40.0 *	2514	** 101%
Varget Most Accurate Powder Tested	44.0 MAX.	2667	** 109%
	42.0	2597	** 104%
	40.0 *	2526	99%
A-2520	44.5 MAX.	2722	** 105%
	42.5 *	2650	** 101%
	40.5	2580	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load