


Cartridge

300 BLK - 125 grain

Version 9.0

NOSLER®

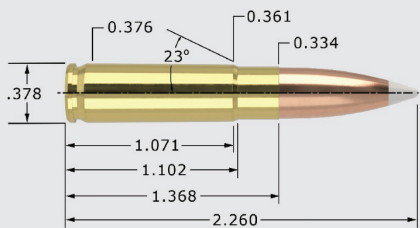

300 BLK - 125 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	125gr. Spitzer	2.060"	0.366	0.188
Ballistic Tip®	BT	125gr. Spitzer	2.060"	0.366	0.188

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	19.1 Gr. WATER	BARREL Length/Make	16" Pac-Nor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
2400	14.5 * MAX. 2001		86%
	13.5 1886		80%
	12.5 1771		74%
IMR 4227	18.0 * MAX. 2004		** 112%
	17.0 1925		** 106%
	16.0 1846		100%
AA 1680	21.5 MAX. 2082		** 118%
	20.5 * 1980		** 113%
	19.5 1877		** 107%
N110	16.5 MAX. 2101		** 114%
	15.5 2023		** 107%
	14.5 * 1946		100%
W296 Most Accurate Powder Tested	17.5 * MAX. 2127		93%
	16.5 2035		88%
	15.5 1943		83%
Lil'Gun	18.0 * MAX. 2151		99%
	17.0 2109		94%
	16.0 2067		88%
Enforcer	17.0 * MAX. 2158		94%
	16.0 2064		88%
	15.0 1970		83%
H110	18.0 * MAX. 2158		96%
	17.0 2066		91%
	16.0 1974		85%
AA 5744	19.5 MAX. 2169		** 117%
	18.5 * 2069		** 111%
	17.5 1969		** 105%
PP 300-MP	19.5 MAX. 2237		** 108%
	18.5 2163		** 102%
	17.5 * 2089		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load