


# Cartridge

## 300 H&H Mag - 125 grain

Version 9.0

# NOSLER®

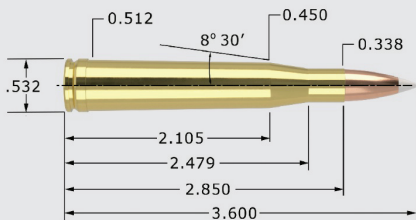

## 300 H&H Mag - 125 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b> 125gr. Spitzer	3.580"	0.366	0.188
Ballistic Tip®	<b>BT</b> 125gr. Spitzer	3.580"	0.366	0.188

CASE TYPE:	Nosler	PRIMER TYPE	CCI 250
CASE HOLDS:	82.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H414</b>	66.0 MAX. 3252		83%
	Most Accurate 64.0 3157		81%
	Powder Tested 62.0 * 3062		78%
<b>IMR 4831</b>	74.0 * MAX. 3348		96%
	72.0 3253		93%
	70.0 3158		91%
<b>IMR 4895</b>	63.0 MAX. 3350		83%
	61.0 3240		80%
	59.0 * 3130		78%
<b>IMR 4350</b>	73.0 * MAX. 3400		95%
	71.0 3270		92%
	69.0 3140		89%
<b>N160</b>	74.5 * MAX. 3414		** 100%
	72.5 3329		98%
	70.5 3243		95%
<b>H4350</b>	73.0 MAX. 3438		94%
	71.0 3333		91%
	69.0 * 3228		88%
<b>H4831SC</b>	81.0 MAX. 3451		** 102%
	79.0 * 3383		100%
	77.0 3315		97%
<b>RL19</b>	82.0 MAX. 3520		** 108%
	80.0 * 3446		** 105%
	78.0 3373		** 103%
<b>N550</b>	74.0 MAX. 3602		100%
	72.0 3505		97%
	70.0 3408		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load