


Cartridge

300 H&H Mag - 150/155 grain

Version 9.0

NOSLER®

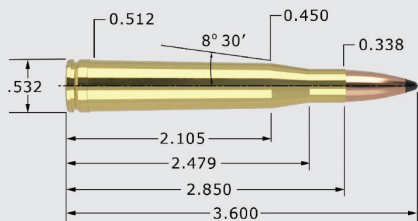

300 H&H Mag - 150/155 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.580"	0.435	0.226
Ballistic Tip®	BT	150gr. Spitzer	3.580"	0.435	0.226
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.580"	0.435	0.226
Expansion Tip®	ET	150gr. Spitzer	3.550"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.580"	0.387	0.226
Custom Competition®	CC	155gr. HPBT	3.580"	0.450	0.233

CASE TYPE:	Nosler.com		PRIMER TYPE	WLRM
CASE HOLDS:	81.0	Gr. WATER	BARREL Length/Make	24" Lilja
			BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL19	73.0 MAX.	3194	98%
	71.0	3091	95%
	69.0 *	2987	93%
IMR 4064	63.5 * MAX.	3234	87%
	61.5	3145	84%
	59.5	3057	81%
N160	72.5 MAX.	3255	99%
	70.5	3176	97%
	68.5 *	3096	94%
IMR 4831	71.5 MAX.	3256	94%
	69.5	3174	92%
	67.5 *	3093	89%
H414	65.5 MAX.	3270	84%
	63.5	3170	82%
	61.5 *	3070	79%
H4831SC	77.0 * MAX.	3292	99%
	75.0	3220	96%
	73.0	3148	94%
IMR 4350	70.0 MAX.	3300	92%
	68.0	3200	90%
	66.0 *	3100	87%
N560	76.0 MAX.	3301	** 104%
	74.0 *	3202	** 102%
	72.0	3102	99%
RL25	80.5 MAX.	3314	** 108%
	78.5 *	3233	** 105%
	76.5	3153	** 103%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load