


# Cartridge

300 H&H Mag - 165/168 grain

Version 9.0

# NOSLER®

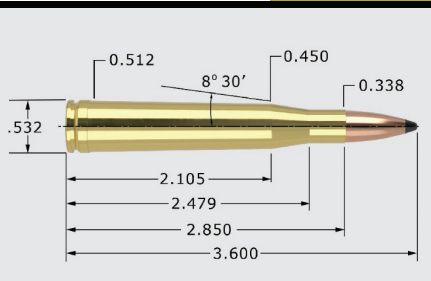

300 H&H Mag - 165/168 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	165gr. Spitzer	3.580"	0.475	0.248
Ballistic Tip®	<b>BT</b>	165gr. Spitzer	3.580"	0.475	0.248
Partition®	<b>PT</b>	165gr. Spitzer	3.580"	0.410	0.248
AccuBond® Long Range	<b>ABLR</b>	168gr. Spitzer	3.580"	0.525	0.253
Ballistic Tip®	<b>BT</b>	168gr. Spitzer	3.580"	0.490	0.253
Bonded Solid Base®	<b>BSB</b>	168gr. PPT	3.360"	0.350	0.253
CT® Ballistic Silvertip®	<b>BST</b>	168gr. Spitzer	3.580"	0.490	0.253
Custom Competition®	<b>CC</b>	168gr. HPBT	3.580"	0.462	0.253
Expansion Tip®	<b>ET</b>	168gr. Spitzer	3.550"	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Reduced Drag Factor™	<b>RDF</b>	168gr. HPBT	3.580"	0.505	0.253

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	79.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4320</b>	59.0 MAX. 2940		81%
	57.0 2840		78%
	55.0 * 2740		75%
<b>W760</b>	66.5 MAX. 3081		87%
	64.5 * 3029		85%
	62.5 2978		82%
<b>RL19</b>	71.0 MAX. 3099		97%
	69.0 2989		94%
	67.0 * 2879		91%
<b>H380</b>	67.0 * MAX. 3100		89%
	65.0 3000		86%
	63.0 2900		83%
<b>IMR 4350</b>	67.0 * MAX. 3118		90%
	65.0 3033		87%
	63.0 2948		85%
<b>RL22</b>	72.5 MAX. 3133		99%
	70.5 3043		96%
	68.5 * 2953		94%
<b>RL25</b>	76.5 * MAX. 3138		** 104%
	74.5 3049		** 102%
	72.5 2961		99%
<b>N560</b>	73.5 MAX. 3139		** 103%
	71.5 3056		100%
	69.5 * 2973		97%
<b>IMR 4831</b>	70.0 MAX. 3148		94%
	68.0 3083		91%
	66.0 * 3018		89%
<b>H4350</b>	70.0 * MAX. 3168		93%
Most Accurate	68.0 3073		90%
Powder Tested	66.0 2978		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load