


# Cartridge

300 H&H Mag - 175/180 grain

Version 9.0

# NOSLER®

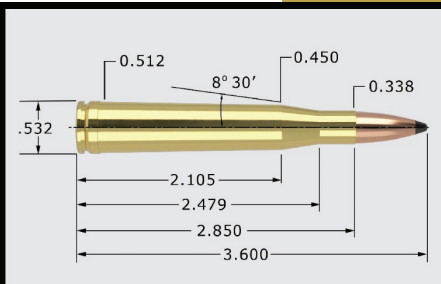

300 H&H Mag - 175/180 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	<b>CC</b>	175gr. HPBT	3.580"	0.505	0.264
Reduced Drag Factor™	<b>RDF</b>	175gr. HPBT	3.580"	0.536	0.264
AccuBond®	<b>AB</b>	180gr. Spitzer	3.580"	0.507	0.271
Ballistic Tip®	<b>BT</b>	180gr. Spitzer	3.580"	0.507	0.271
CT® Ballistic Silvertip®	<b>BST</b>	180gr. Spitzer	3.580"	0.507	0.271
Expansion Tip®	<b>ET</b>	180gr. Spitzer	3.550"	0.523	0.271

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	180gr. PPT	3.550"	0.361	0.271
Partition®	<b>PT</b>	180gr. Spitzer	3.580"	0.474	0.271

CASE TYPE:	Nosler		PRIMER TYPE	CCI250		
CASE HOLDS:	77.6	Gr. WATER	BARREL Length/Make	24" Lilja		
			BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>H380</b>	62.5	MAX. 2862	85%			
	60.5	2767	82%			
	58.5 *	2672	79%			
<b>H4831SC</b>	69.0	MAX. 2882	93%			
	67.0	2781	90%			
	65.0 *	2680	87%			
<b>N165</b>	70.0	MAX. 2920	**	100%		
	68.0	2837	97%			
	66.0	2754	95%			
<b>IMR 4831</b>	66.0	MAX. 2940	91%			
	Most Accurate	64.0	2880	88%		
	Powder Tested	62.0 *	2820	85%		
<b>RL19</b>	69.0 *	MAX. 2958	97%			
	67.0	2867	94%			
	65.0	2776	91%			
<b>N560</b>	69.0	MAX. 2986	99%			
	67.0 *	2893	96%			
	65.0	2799	93%			
<b>RL25</b>	72.5 *	MAX. 3002	**	102%		
	70.5	2947	99%			
	68.5	2892	96%			
<b>IMR 4350</b>	65.0 *	MAX. 3010	90%			
	63.0	2950	87%			
	61.0	2890	84%			
<b>RL22</b>	71.0	MAX. 3023	99%			
	69.0	2928	97%			
	67.0 *	2834	94%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load