


Cartridge

300 H&H Mag - 190 grain

Version 9.0

NOSLER®

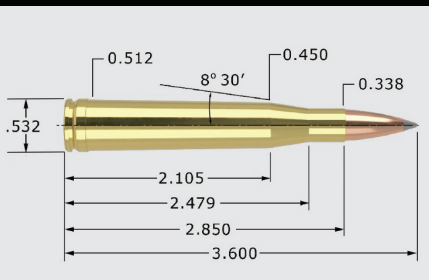

300 H&H Mag - 190 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 190gr. Spitzer	3.580"	0.597	0.286
Custom Competition®	CC 190gr. HPBT	3.580"	0.530	0.286

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	77.2 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	68.0 MAX. 2763		92%
	66.0 2670		89%
	64.0 * 2577		86%
AA 4350	64.0 MAX. 2774		93%
	62.0 * 2692		90%
	60.0 2610		87%
H4350	63.0 * MAX. 2795		86%
	61.0 2705		84%
	59.0 2615		81%
IMR 4831	65.5 MAX. 2824		91%
	63.5 * 2712		88%
	61.5 2601		85%
N165	68.5 MAX. 2826		99%
	66.5 2730		96%
	64.5 * 2634		93%
N560	68.0 MAX. 2853		98%
	66.0 * 2747		95%
	64.0 2641		92%
RL25	72.0 MAX. 2865		** 101%
	70.0 2788		99%
	68.0 * 2710		96%
RL19	67.0 MAX. 2874		94%
	65.0 2773		92%
	63.0 * 2672		89%
Norma MRP	67.5 MAX. 2886		96%
	65.5 2781		93%
	63.5 * 2676		90%
RL22	68.0 MAX. 2894		96%
Most Accurate	66.0 2790		93%
Powder Tested	64.0 * 2687		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load