


Cartridge

300 H&H Mag - 200 grain

Version 9.0

NOSLER[®]

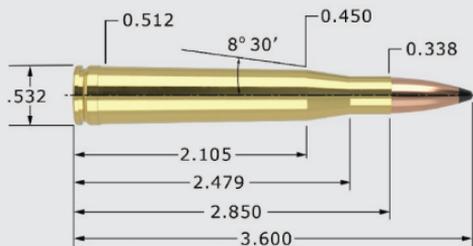

300 H&H Mag - 200 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond [®]	AB 200gr. Spitzer	3.580"	0.588	0.301
Partition [®]	PT 200gr. Spitzer	3.580"	0.481	0.301

CASE TYPE:	Nosler	PRIMER TYPE	CCI 250
CASE HOLDS:	77.0 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
H4350	62.5 * MAX.	2771	86%	
	60.5	2697	83%	
	58.5	2624	80%	
H4831SC	67.0 * MAX.	2784	91%	
	Most Accurate	65.0	2721	88%
	Powder Tested	63.0	2658	85%
N550	61.0 * MAX.	2797	88%	
	59.0	2705	85%	
	57.0	2613	82%	
RL19	65.5 * MAX.	2798	92%	
	63.5	2720	90%	
	61.5	2642	87%	
N560	66.0 MAX.	2812	95%	
	64.0	2725	92%	
	62.0 *	2638	89%	
IMR 4350	63.0 MAX.	2820	88%	
	61.0	2760	85%	
	59.0 *	2700	82%	
IMR 4831	65.0 MAX.	2822	90%	
	63.0	2747	88%	
	61.0 *	2672	85%	
RL22	67.0 * MAX.	2827	95%	
	65.0	2744	92%	
	63.0	2662	89%	
RL25	69.5 MAX.	2848	98%	
	67.5	2759	95%	
	65.5 *	2671	92%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load