


Cartridge

300 H&H Mag - 210 grain

Version 9.0

NOSLER®

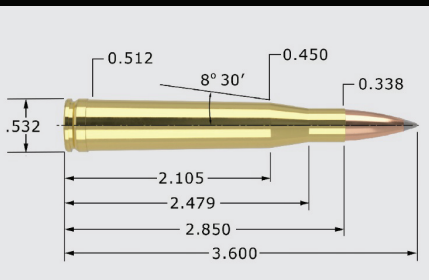

300 H&H Mag - 210 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 210gr. Spitzer	3.600"	0.661	0.316
Reduced Drag Factor™	RDF 210gr. HPBT	3.600"	0.707	0.316

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	72.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	58.0 * MAX.	2598	86%
		2506	83%
		2413	80%
N165	63.0 MAX.	2642	97%
		2564	94%
	59.0 *	2487	91%
IMR 4831	61.0 MAX.	2657	90%
	59.0 *	2553	87%
		2449	84%
H4831SC	65.0 MAX.	2671	94%
	63.0 *	2587	91%
		2503	88%
RL19	62.0 MAX.	2677	93%
	Most Accurate	2583	90%
	Powder Tested	58.0 * 2489	87%
Norma MRP	62.5 MAX.	2678	95%
	60.5 *	2584	92%
		2491	89%
RL22	62.0 MAX.	2684	93%
	60.0 *	2611	90%
		2538	87%
IMR 7828	65.0 MAX.	2695	96%
	63.0 *	2598	93%
		2502	90%
RL25	66.0 * MAX.	2701	99%
		2635	96%
		2569	93%
N560	64.0 MAX.	2719	98%
	62.0 *	2622	95%
		2525	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load