


Cartridge

300 H&H Mag - 220 grain

Version 9.0

NOSLER®

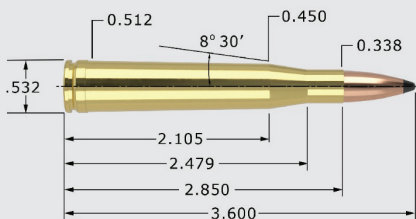

300 H&H Mag - 220 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC 220gr. HPBT	3.600"	0.690	0.331
Partition®	PT 220gr. Semi-Spitzer	3.580"	0.351	0.331

CASE TYPE:	Nosler	PRIMER TYPE	CCI 250
CASE HOLDS:	76.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160	58.5 * MAX.	2532	85%
	56.5	2465	82%
	54.5	2398	79%
IMR 4350	59.5 * MAX.	2629	83%
	57.5	2552	80%
	55.5	2476	77%
H4831SC Most Accurate Powder Tested	65.0 * MAX.	2645	88%
	63.0	2580	86%
	61.0	2514	83%
N560	64.0 MAX.	2647	93%
	62.0	2580	90%
	60.0 *	2512	87%
RL25	67.0 MAX.	2675	95%
	65.0	2610	92%
	63.0 *	2545	89%
IMR 4831	62.5 MAX.	2684	87%
	60.5	2611	84%
	58.5 *	2539	82%
RL19	63.5 * MAX.	2695	90%
	61.5	2628	87%
	59.5	2561	84%
RL22	65.0 MAX.	2702	92%
	63.0	2620	89%
	61.0 *	2538	87%
IMR 7828	67.5 * MAX.	2718	94%
	65.5	2594	91%
	63.5	2469	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load