


Cartridge

300 RCM - 125 grain

Version 9.0

NOSLER[®]

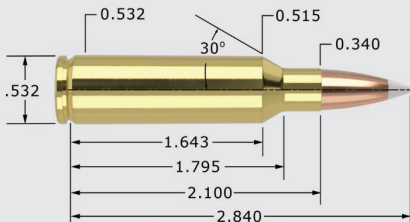

300 RCM - 125 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.840"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond [®]	AB	125gr. Spitzer	2.800"	0.366	0.188
Ballistic Tip [®]	BT	125gr. Spitzer	2.800"	0.366	0.188
CASE TYPE:	Hornady	PRIMER TYPE	WLRM		
CASE HOLDS:	66.7 Gr. WATER	BARREL Length/Make	24" Pac-Nor		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4064	58.0 MAX. 3342		96%		
Most Accurate	56.0 3203		93%		
Powder Tested	54.0 * 3064		89%		
RL15	60.0 MAX. 3354		94%		
	58.0 3227		91%		
	56.0 * 3099		87%		
W760	65.0 MAX. 3393		**	102%	
	63.0 * 3272		99%		
	61.0 3151		96%		
Varget	60.0 MAX. 3406		97%		
	58.0 3302		94%		
	56.0 * 3198		91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load