


# Cartridge

## 300 RCM - 165/168 grain

Version 9.0

# NOSLER®

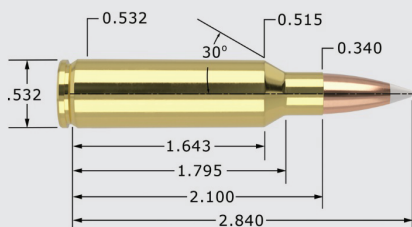

## 300 RCM - 165/168 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.840"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	165gr. Spitzer	2.820"	0.475	0.248
Ballistic Tip®	<b>BT</b>	165gr. Spitzer	2.820"	0.475	0.248
Partition®	<b>PT</b>	165gr. Spitzer	2.820"	0.410	0.248
AccuBond® Long Range	<b>ABLR</b>	168gr. Spitzer	2.820"	0.525	0.253
Ballistic Tip®	<b>BT</b>	168gr. Spitzer	2.820"	0.490	0.253
Bonded Solid Base®	<b>BSB</b>	168gr. PPT	2.600"	0.350	0.253
CT® Ballistic Silvertip®	<b>BST</b>	168gr. Spitzer	2.820"	0.490	0.253
Custom Competition®	<b>CC</b>	168gr. HPBT	2.820"	0.462	0.253
Expansion Tip®	<b>ET</b>	168gr. Spitzer	2.780"	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Reduced Drag Factor™	<b>RDF</b>	168gr. HPBT	2.820"	0.505	0.253

CASE TYPE:	Hornady	PRIMER TYPE	WLRM
CASE HOLDS:	62.8 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>W760</b>	59.0 MAX.	2900	98%	
	57.0 *	2817	95%	
	55.0	2734	92%	
<b>RL19</b>	63.0 MAX.	2911	** 109%	
	61.0	2818	** 106%	
	59.0 *	2725	** 102%	
<b>Hybrid 100V</b>	59.5 MAX.	2960	98%	
	Most Accurate	57.5 *	2851	94%
	Powder Tested	55.5	2742	91%
<b>Hunter</b>	65.0 MAX.	3019	** 107%	
	63.0	2931	** 103%	
	61.0 *	2843	** 100%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load