


Cartridge

300 RCM - 175/180 grain

Version 9.0

NOSLER®

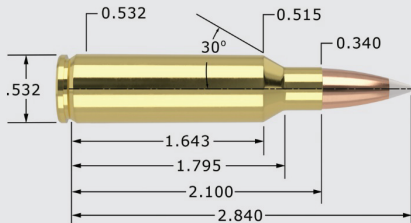

300 RCM - 175/180 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.840	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	175gr. HPBT	2.760"	0.505	0.264
Reduced Drag Factor™	RDF	175gr. HPBT	2.760"	0.536	0.264
AccuBond®	AB	180gr. Spitzer	2.820"	0.507	0.271
Ballistic Tip®	BT	180gr. Spitzer	2.820"	0.507	0.271
CT® Ballistic Silvertip®	BST	180gr. Spitzer	2.820"	0.507	0.271
Expansion Tip®	ET	180gr. Spitzer	2.780"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	180gr. PPT	2.740"	0.361	0.271
Partition®	PT	180gr. Spitzer	2.820"	0.474	0.271

CASE TYPE:	Hornady	PRIMER TYPE	WLRM
CASE HOLDS:	61.4 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Hybrid 100V	58.0 MAX. 2868		97%
	56.0		94%
	54.0 * 2666		91%
RL19	63.0 MAX. 2898		** 112%
	61.0 * 2809		** 108%
	59.0 2719		** 104%
Hunter	63.0 MAX. 2906		** 106%
	61.0 2809		** 102%
	59.0 * 2713		99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load