


Cartridge

300 Rem Ultra Mag - 125 grain

Version 9.0

NOSLER®

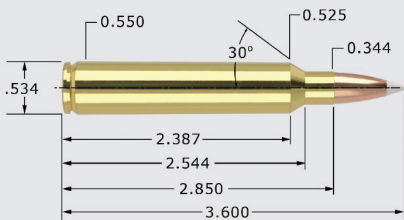

300 Rem Ultra Mag - 125 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	125gr. Spitzer	3.600"	0.366	0.188
Ballistic Tip®	BT	125gr. Spitzer	3.600"	0.366	0.188
CASE TYPE:	Nosler		PRIMER TYPE	Fed 215	
CASE HOLDS:	110.0	Gr. WATER	BARREL Length/Make	26" Wiseman	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL26	100.0	MAX. 3662	93%		
	98.0 *	3538	91%		
	96.0	3414	91%		
H1000	107.0	MAX. 3676	** 103%		
	105.0 *	3616	** 101%		
	103.0	3557	99%		
Magnum	109.0	MAX. 3786	** 101%		
	107.0	3679	99%		
	105.0 *	3572	97%		
H4831SC	100.0	MAX. 3802	95%		
	98.0 *	3740	93%		
	96.0	3679	91%		
MAGPRO	105.5	MAX. 3816	99%		
	103.5	3747	97%		
	101.5 *	3679	95%		
IMR 4350	94.0	MAX. 3820	91%		
	92.0	3804	89%		
	90.0 *	3789	88%		
IMR 7828	100.0 *	MAX. 3823	97%		
	98.0	3724	95%		
	96.0	3625	93%		
Returnbo	109.0 *	MAX. 3833	** 107%		
	107.0	3747	** 105%		
	105.0	3662	** 103%		
RL22	100.5	MAX. 3861	99%		
	98.5 *	3725	97%		
	96.5	3590	95%		
RL25	104.0	MAX. 3907	** 103%		
	102.0 *	3808	** 101%		
	100.0	3708	99%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load