


# Cartridge

## 300 Rem Ultra Mag - 150/155 grain

Version 9.0

# NOSLER®

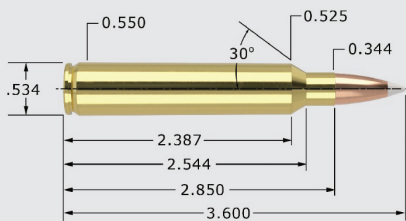

## 300 Rem Ultra Mag - 150/155 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	3.580"	0.435	0.226
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	3.580"	0.435	0.226
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	3.580"	0.435	0.226
Expansion Tip®	<b>ET</b>	150gr. Spitzer	3.550"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	3.560"	0.387	0.226
Custom Competition®	<b>CC</b>	155gr. HPBT	3.580"	0.450	0.233

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	107.7 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL26</b>	94.5 MAX.	3392	90%
	92.5	3290	88%
	90.5 *	3188	86%
<b>H4831SC</b>	92.0 MAX.	3482	89%
	Most Accurate	3408	87%
	Powder Tested	88.0 * 3335	85%
<b>IMR 4350</b>	87.0 * MAX.	3504	86%
	85.0	3437	84%
	83.0	3369	82%
<b>H1000</b>	102.0 MAX.	3514	** 100%
	100.0 *	3447	98%
	98.0	3381	96%
<b>MAGPRO</b>	98.5 MAX.	3527	94%
	96.5 *	3458	92%
	94.5	3390	90%
<b>Magnum</b>	104.5 MAX.	3532	99%
	102.5	3451	97%
	100.5 *	3370	95%
<b>IMR 7828</b>	93.0 * MAX.	3548	92%
	91.0	3462	90%
	89.0	3376	88%
<b>Retumbo</b>	102.0 MAX.	3555	** 102%
	100.0 *	3508	100%
	98.0	3460	98%
<b>RL22</b>	94.5 MAX.	3559	95%
	92.5 *	3508	93%
	90.5	3458	91%
<b>RL25</b>	98.5 MAX.	3629	99%
	96.5	3539	97%
	94.5 *	3449	95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load