


Cartridge

300 Rem Ultra Mag - 165/168 grain

Version 9.0

NOSLER®

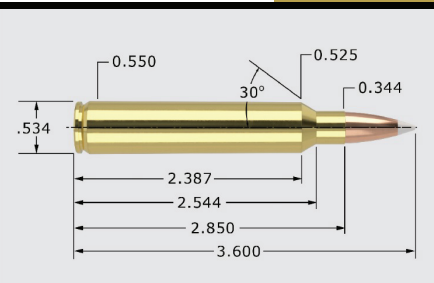

300 Rem Ultra Mag - 165/168 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	165gr. Spitzer	3.580"	0.475	0.248
Ballistic Tip®	BT	165gr. Spitzer	3.580"	0.475	0.248
Partition®	PT	165gr. Spitzer	3.580"	0.410	0.248
AccuBond® Long Range	ABLR	168gr. Spitzer	3.580"	0.525	0.253
Ballistic Tip®	BT	168gr. Spitzer	3.580"	0.490	0.253
Bonded Solid Base®	BSB	168gr. PPT	3.360"	0.350	0.253
CT® Ballistic Silvertip®	BST	168gr. Spitzer	3.580"	0.490	0.253
Custom Competition®	CC	168gr. HPBT	3.580"	0.462	0.253
Expansion Tip®	ET	168gr. Spitzer	3.550"	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Reduced Drag Factor™	RDF	168gr. HPBT	3.580"	0.505	0.253

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	105.2 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	84.0	MAX.	3323	85%
	82.0		3242	83%
	80.0	*	3162	81%
H4831SC	90.0	* MAX.	3330	89%
	88.0		3271	87%
	86.0		3211	85%
H1000	98.0	MAX.	3336	99%
	96.0	*	3268	97%
	94.0		3199	95%
IMR 7828	90.0	MAX.	3340	91%
	88.0	*	3255	89%
	86.0		3170	87%
MAGPRO	95.0	MAX.	3367	93%
	93.0		3338	91%
	91.0	*	3309	89%
RL22	90.0	MAX.	3369	93%
	88.0	*	3310	91%
	86.0		3250	89%
Retumbo	98.0	* MAX.	3394	** 100%
	96.0		3325	98%
	94.0		3257	96%
Magnum	102.0	MAX.	3446	98%
	100.0		3353	97%
	98.0	*	3261	95%
RL25	96.5	MAX.	3479	100%
	94.5	*	3379	98%
	92.5		3279	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load