


Cartridge

300 Rem Ultra Mag - 175/180gr

Version 9.0

NOSLER®

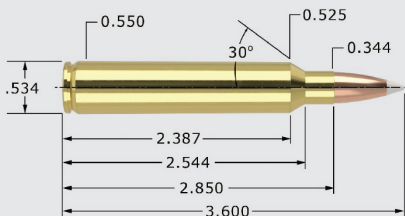

300 Rem Ultra Mag - 175/180 grain 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	175gr. HPBT	3.580"	0.505	0.264
Reduced Drag Factor™	RDF	175gr. HPBT	3.580"	0.536	0.264
AccuBond®	AB	180gr. Spitzer	3.580"	0.507	0.271
Ballistic Tip®	BT	180gr. Spitzer	3.580"	0.507	0.271
CT® Ballistic Silvertip®	BST	180gr. Spitzer	3.580"	0.507	0.271
Expansion Tip®	ET	180gr. Spitzer	3.550"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	180gr. PPT	3.460"	0.361	0.271
Partition®	PT	180gr. Spitzer	3.560"	0.474	0.271

CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	104.7	Gr. WATER	BARREL Length/Make	24" H-S Prec.	
			BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL33	102.0 * MAX.	3179		99%
	100.0	3114		97%
	98.0	3050		96%
IMR 4350 Most Accurate Powder Tested	82.0 MAX.	3189		84%
	80.0 *	3122		82%
	78.0	3055		80%
Retumbo	95.0 MAX.	3203		98%
	93.0 *	3118		96%
	91.0	3034		93%
H1000	94.0 MAX.	3203		95%
	92.0 *	3137		93%
	90.0	3071		91%
H4831SC	88.0 MAX.	3208		88%
	86.0 *	3150		86%
	84.0	3092		84%
RL22	87.0 * MAX.	3219		90%
	85.0	3148		88%
	83.0	3076		86%
IMR 7828	89.0 MAX.	3221		90%
	87.0 *	3153		88%
	85.0	3085		86%
PP 4000-MR	84.0 MAX.	3226		84%
	82.0 *	3147		82%
	80.0	3068		80%
MAGPRO	94.0 MAX.	3246		93%
	92.0	3187		91%
	90.0 *	3129		89%
RL25	95.0 MAX.	3357		99%
	93.0	3276		97%
	91.0 *	3196		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load