


Cartridge

300 Rem Ultra Mag - 190 grain

Version 9.0

NOSLER®

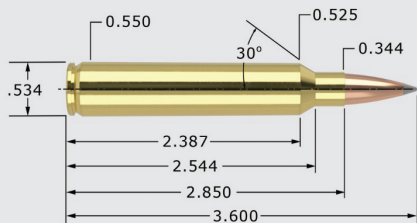

300 Rem Ultra Mag - 190 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	190gr. Spitzer	3.600"	0.597	0.286
Custom Competition®	CC	190gr. HPBT	3.580"	0.530	0.286
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	104.4 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N165	90.0 MAX.	3100	96%		
	88.0 *	3025	94%		
	86.0	2951	92%		
MAGPRO	93.0 MAX.	3106	92%		
	91.0	3056	90%		
	89.0 *	3007	88%		
IMR 7828 SSC	88.0 * MAX.	3107	87%		
	86.0	3060	85%		
	84.0	3013	83%		
Norma MRP	87.0 MAX.	3124	92%		
	85.0 *	3056	89%		
	83.0	2989	87%		
RL22	87.5 * MAX.	3148	91%		
	85.5	3092	89%		
	83.5	3035	87%		
RL25	92.0 * MAX.	3165	96%		
	90.0	3101	94%		
	88.0	3038	92%		
H1000 Most Accurate Powder Tested	92.5 MAX.	3170	94%		
	90.5 *	3108	92%		
	88.5	3046	90%		
Magnum	93.0 MAX.	3174	90%		
	91.0	3123	88%		
	89.0 *	3072	87%		
Retumbo	95.0 MAX.	3191	98%		
	93.0	3112	96%		
	91.0 *	3033	94%		
N560	89.0 MAX.	3197	95%		
	87.0	3147	93%		
	85.0 *	3098	90%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load