


Cartridge

300 Rem Ultra Mag - 200 grain

Version 9.0

NOSLER[®]

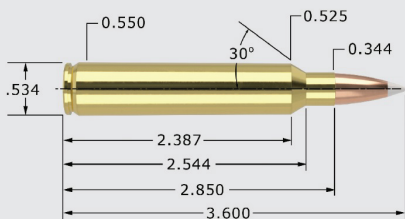

300 Rem Ultra Mag - 200 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond [®]	AB 200gr. Spitzer	3.580"	0.588	0.301
Partition [®]	PT 200gr. Spitzer	3.580"	0.481	0.301

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	102.8 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N170	82.0 MAX. 2940		89%
	80.0 * 2885		86%
	78.0 2830		84%
IMR 4350	81.0 MAX. 2994		84%
	79.0 2955		82%
	77.0 * 2915		80%
H1000	92.0 MAX. 3043		95%
	90.0 2986		93%
	88.0 * 2928		91%
H4831SC	86.5 MAX. 3057		88%
	84.5 3012		86%
	82.5 * 2967		84%
Magnum	93.0 * MAX. 3070		92%
Most Accurate	91.0 3005		90%
Powder Tested	89.0 2941		88%
Retumbo	91.5 * MAX. 3070		96%
	89.5 3015		94%
	87.5 2960		92%
IMR 7828	87.5 MAX. 3101		91%
	85.5 3025		88%
	83.5 * 2950		86%
MAGPRO	90.0 MAX. 3160		90%
	88.0 * 3053		88%
	86.0 2946		86%
RL25	91.5 MAX. 3185		97%
	89.5 3124		95%
	87.5 * 3064		93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load