


Cartridge

300 Rem Ultra Mag - 210 grain

Version 9.0

NOSLER®

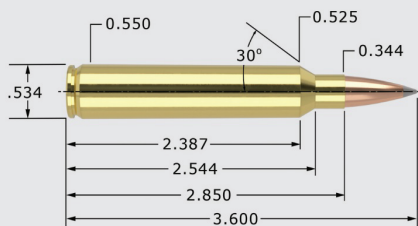

300 Rem Ultra Mag - 210 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	210gr. Spitzer	3.600"	0.661	0.316
Reduced Drag Factor™	RDF	210gr. HPBT	3.600"	0.707	0.316
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	100.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL22	82.0 * MAX.	2927	89%		
	80.0	2846	87%		
	78.0	2764	85%		
Retumbo	91.0 * MAX.	2935	98%		
	89.0	2857	96%		
	87.0	2779	94%		
MAGPRO	89.0 * MAX.	2941	92%		
	87.0	2878	90%		
	85.0	2815	88%		
IMR 7828 SSC	85.0 MAX.	2957	88%		
	Most Accurate	2880	86%		
	Powder Tested	81.0 *	2802	84%	
Magnum	92.0 * MAX.	2969	93%		
	90.0	2924	91%		
	88.0	2880	89%		
H1000	90.0 * MAX.	2983	95%		
	88.0	2916	93%		
	86.0	2848	91%		
RL33	99.0 MAX.	2991	** 101%		
	97.0 *	2931	99%		
	95.0	2871	97%		
Norma 217	93.0 * MAX.	3007	** 104%		
	91.0	2909	** 102%		
	89.0	2811	100%		
US869	106.0 MAX.	3029	** 109%		
	104.0 *	2970	** 107%		
	102.0	2911	** 105%		
RL25	90.5 * MAX.	3053	98%		
	88.5	2987	96%		
	86.5	2921	94%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load